



Germicidal UV Light System For Coils Up To 72" x 72"*

This system is designed to save energy and maintenance costs associated with commercial HVAC. A biofilm of only 0.002" can reduce efficiency by 37%! Ultraviolet germicidal irradiation (UVGI) is the most cost-effective and practical solution.


Blue-Tube XL offers easy and flexible installation. It includes an advanced multi-voltage water-resistant power supply. All parts (except lamps) are covered by a lifetime warranty. This system also improves indoor air quality by sterilizing airborne bacteria, viruses, and allergens.

SYSTEM BENEFITS

- 99.9% surface disinfection GUARANTEED
- Sterilizes mold, bacteria, viruses
- Disinfects coil & drain pan
- Improves HVAC system efficiency
- Improves indoor air quality

SYSTEM FEATURES

- Easy to install
- Fits coils from 18" x 32" to 72" x 72"
- 2 year guaranteed lamp life
- Includes everything needed for most installations
- Scalable design for multi-lamp configurations
- Lifetime warranty on all parts except lamp(s)
- Water-resistant heavy-duty power supply
- Optional door interlock switch (TUVC-INTLCK)

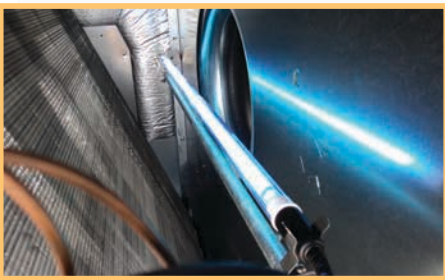

Simple & Easy

Fresh-Aire UV just made commercial UVGI easier with Blue-Tube XL. Kits are available for coils up to 72". Everything needed for most installations is included in the box.



800-741-1195

WWW.FRESHAIREUV.COM

© Fresh-Aire UV


SALES@FRESHAIREUV.COM


TUVC-BTXL-SPEC 2.8.19

Made in USA



Blue-Tube XL Coil Sizing Reference

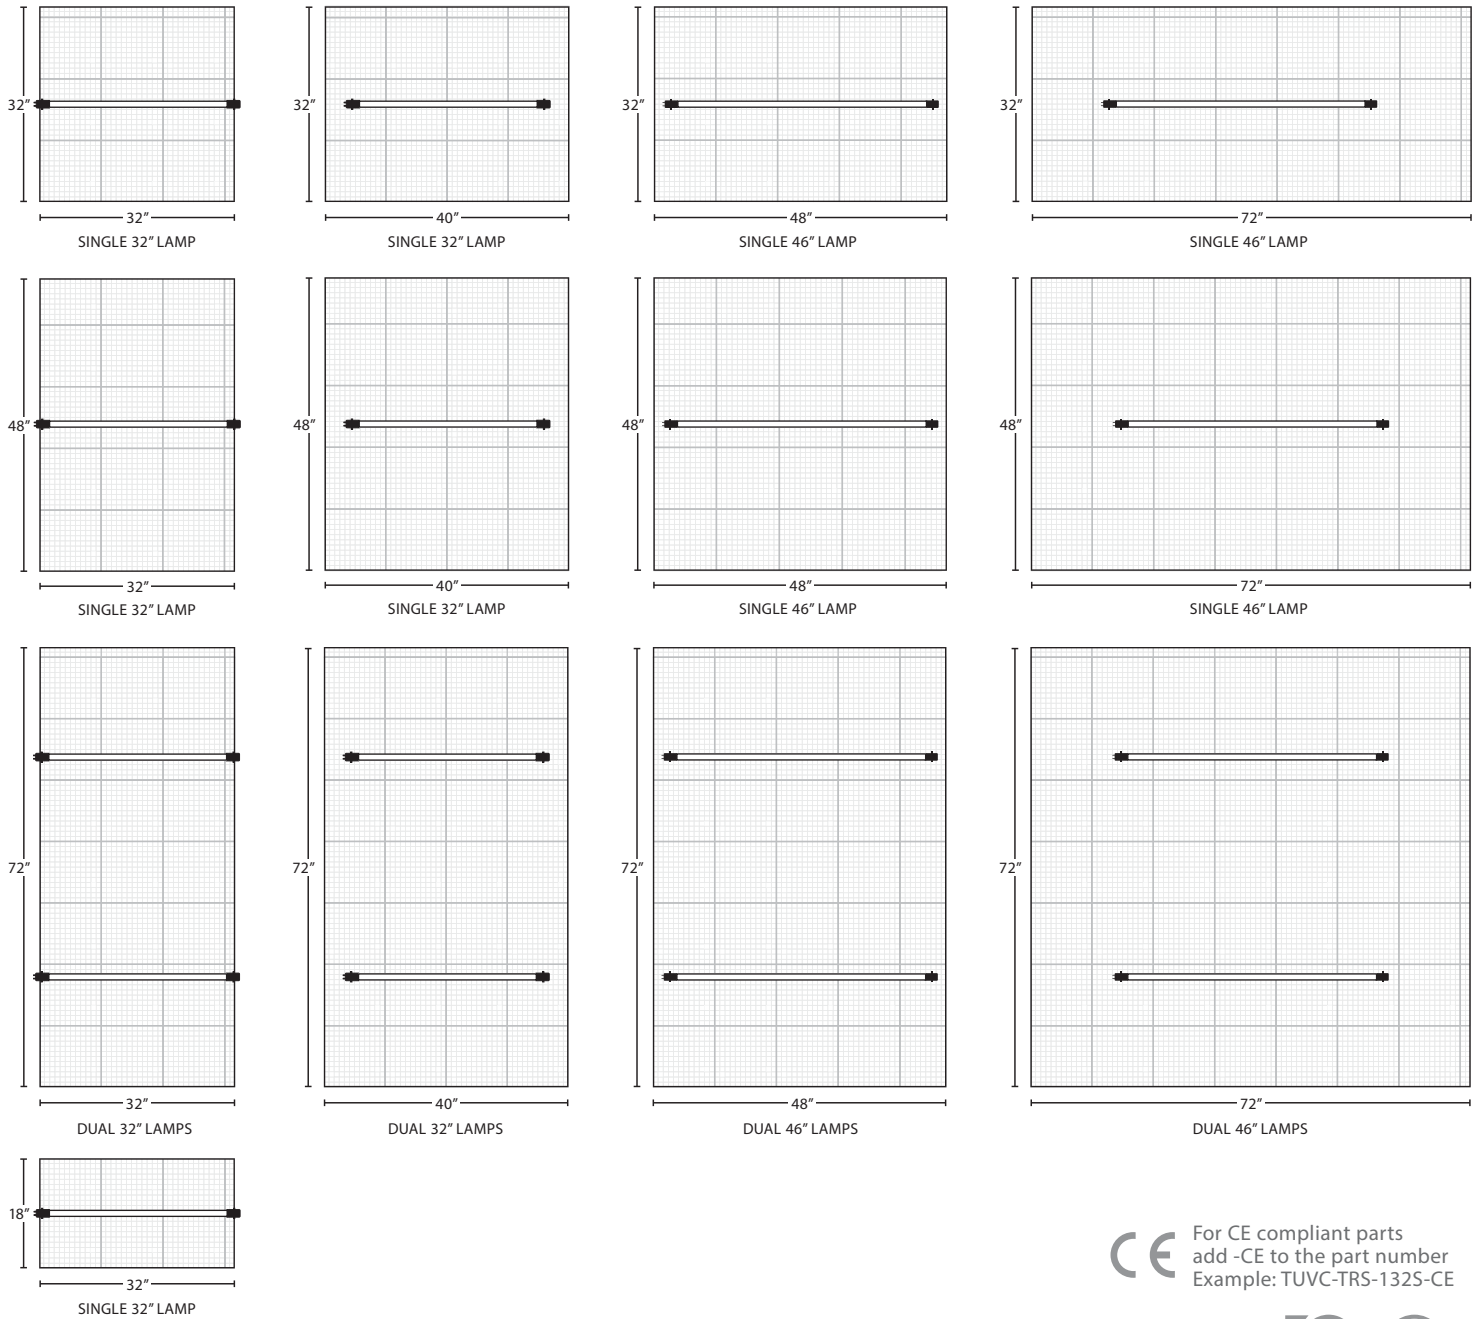

 For CE compliant parts
 add -CE to the part number
 Example: TUVCL-232HO-CE



Blue-Tube XL Specs

KIT INCLUDES		POWER SUPPLY DIMENSIONS		ELECTRICAL
Remote power supply, 10' lamp cable, 6' power cord, UV lamp, mounting hardware and view port, 0.5" EMT conduit, magnets (4)		13"L x 3.75"W x 2.5"H		2-3 amps
KIT PART #	LAMP DESCRIPTION	LAMP PART #	POWER SUPPLY	POWER SUPPLY CE
TUVC-TRS-232S-HO-BTXL	32" 18000 hrs, high output, single	TUVCL-232HO	TUVCPS-HS	TUVCPS-HS-CE
TUVC-TRS-232D-HO-BTXL	32" 18000 hrs, high output, dual	TUVCL-232HO	TUVCPS-H32D	TUVCPS-H32D-CE
TUVC-TRS-246S-HO-BTXL	46" 18000 hrs, high output, single	TUVCL-246HO	TUVCPS-HS	TUVCPS-HS-CE
TUVC-TRS-246D-HO-BTXL	46" 18000 hrs, high output, dual	TUVCL-246HO	TUVCPS-H46D	TUVCPS-H46D-CE